


COILING SERVICE DOOR—MODEL S22*

08330/ATL
Buyline 0371

- Hand chain operated
 - Interior between jamb mounted
 - Standard, not weatherstripped
- For weatherstripped doors see Model S26.

*Suffix letters indicate material and/or finish of curtain.
For alternate material or finish of curtain see Optional Features.

GS Galvanized without baked-on finish coat
PS Galvanized with baked-on finish coat
MA Mill finish aluminum
AA Clear anodized aluminum
DA Bronze aluminum
ST Stainless steel

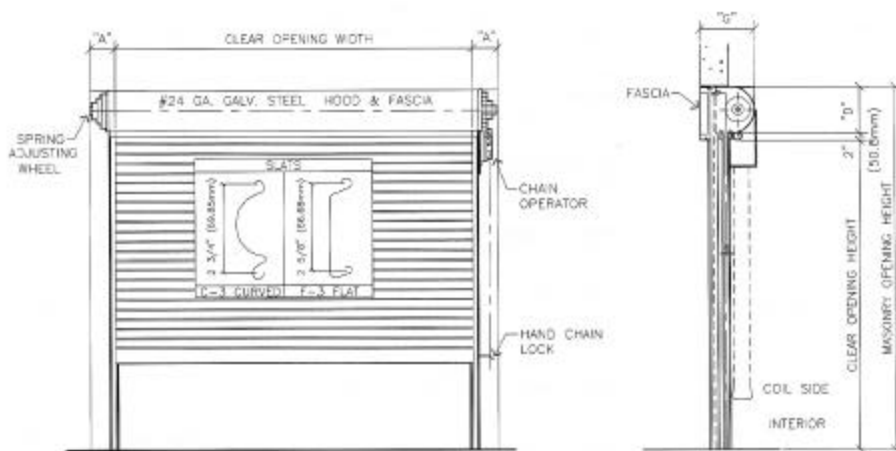


COIL SIDE ELEVATION
RIGHT HAND OPERATION AS SHOWN
LEFT HAND OPERATION IS OPPOSITE AS SHOWN

SECTION

Windlocks are standard on doors over 18'-4 1/4" (5610 mm) wide and optional for doors under 18'-4 1/4" (5610 mm) wide.

Where clearances are critical, dimensions shown can be reduced. Consult Technical Services.

GUIDE DETAILS

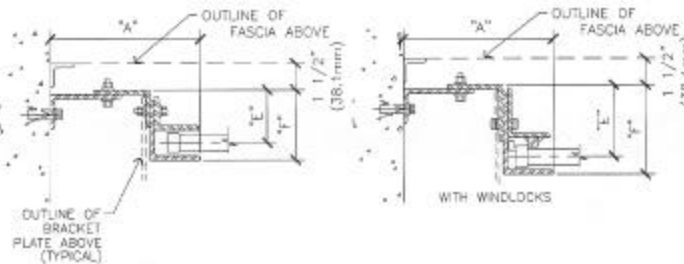

atlas door

COILING SERVICE DOOR—MODEL S22PS

08330/ATL
Buyline 0371

SPECIFICATIONS

PART 1 GENERAL

1.01 Section Includes

A. Type: Coiling Service Doors are to be Atlas Door™ Model S22PS as manufactured by Clopay Building Products Company, Inc.

B. Operation: To be chain hoist operated using gear reduction and galvanized hand chain.

C. Mounting: To be interior mounted between jambs and under lintel in a prepared opening.

1.02 Related Work

A. Opening preparation, miscellaneous or structural steel, access panels, finish or field painting are in the scope of the work of other sections or trades.

B. Submit manufacturer's product data and installation instructions for each type of coiling door. Include both published data and any specific data prepared for this project.

1.03 Single-Source Responsibility

A. Provide doors, guides, motors, and accessories from one manufacturer for each type of door. Provide secondary components from source acceptable to manufacturer of primary components.

PART 2 PRODUCT

2.01 Curtain

A. Slats: Cold roll-formed in continuous lengths of galvanized steel interlocked to form curtains.

B. Endlocks: Each end of alternate slats to be fitted with endlocks to act as a wearing surface in the guides and to maintain slat alignment.

C. Windload: Door construction designed to satisfy windload of 20 PSF (0.96 kPa) or 87 MPH (140 KPH).

D. Gauge: Thickness of slat material to be as required by width of opening and windloading conditions.

E. Galvanizing: Zinc-coated in accordance with ASTM A653.

F. Bottom Bar: Curtain to be reinforced with a bottom bar consisting of two steel angles.

2.02 Spring Counterbalance

A. Counterbalance: Housed in a steel pipe of diameter and wall thickness to restrict maximum deflection to .03" per foot (2.5 mm/m) of door width.

B. Springs: To be helical torsion type designed to include an overload factor of 25% and for optimum ease of operation. Springs are to be grease-packed and are to be mounted on a cold rolled steel inner shaft.

C. Hand Chain: Pull not to exceed 35 lbs (156N).

D. Spring Tension: Adjustable from outside of end bracket plate.

E. Ball Bearing: Sealed, to minimize wear of pipe shaft rotation around inner shaft.

2.03 Bracket Plates

A. Bracket Plates: Carrying pipe counterbalancing shaft are to be no less than 1/4" (6.35 mm) thickness and to house ends of door coil. Shape of plate to be square.

B. Drive End Bracket Plate: Fitted with a sealed ball bearing.

2.04 Guide and Wall Angle Assembly

A. Guides/Wall Angles: Structural steel angles of 3/4" (4.76 mm) minimum thickness.

B. Depth of Guide: To provide adequate slat penetration to satisfy specified windloading.

2.05 Hoods

A. Hoods: To house coil are to be fabricated of #24 U.S. Gauge galvanized steel.

B. Reinforcing: To be laterally reinforced to prevent sag.

C. Intermediate Hood Supports: Furnish where door width exceeds 16'-0" (4877 mm).

D. Fascia: Provide galvanized closure as required.

2.06 Locking

A. Hand Chain Lock: Locking bracket, mounted on guide angle, suitable for padlocking (padlock by others).

2.07 Finish

A. Galvanized Surfaces: Slats and hood (etc.) galvanized. Baked-on gray or tan coat of epoxy modified polyester on slats and hood. Shop coat of rust-inhibiting metallic primer on all remaining ungalvanized surfaces, except bearings.

B. Ungalvanized Surfaces: Shall consist of a shop coat of rust-inhibiting metallic primer (gray) (brown) on exposed ferrous surfaces, except bearings.

PART 3 EXECUTION

3.01 Examination

A. Verify that dimensions are correct and project conditions are suitable for installation. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.02 Installation

A. Installation: To be by authorized Atlas Door representative and in accordance with Atlas Door standards and instructions.

B. Submit manufacturer's product data and installation instructions for each type of coiling door. Include both published data and any specific data prepared for this project.

Note to Specifiers...Please see end of this section for frequently specified Optional Features.

Clear Opening Height	Without Windlocks				With Windlocks				Clear Opening Width	Without Windlocks		With Windlocks	
	"D"	"G"	"E"	"F"	"D"	"G"	"E"	"F"		"A"	"A"	"A"	"A"
to 9'-1"	16"	18"	3"	3 1/2"	17"	19"	3 1/2"	4 1/2"	to 12'-4 1/2"	3"	8 1/2"	8 1/2"	8 1/2"
(2768 mm)	(406.4 mm)	(457.2 mm)	(76.2 mm)	(89.3 mm)	(431.8 mm)	(482.6 mm)	(86.4 mm)	(117.5 mm)	(3781 mm)	(203.2 mm)	(215.4 mm)	(215.4 mm)	(215.4 mm)
9'-1 1/2" to 11'-1"	17"	19"	3"	3 1/2"	18"	20"	3 1/2"	4 1/2"	12'-5" to 18'-4 1/2"	8 1/2"	8 1/2"	8 1/2"	8 1/2"
(2772 mm) (3378 mm)	(431.8 mm)	(482.6 mm)	(76.2 mm)	(89.3 mm)	(457.2 mm)	(508.0 mm)	(86.4 mm)	(117.5 mm)	(3785 mm) (5610 mm)	(208.0 mm)	(215.4 mm)	(215.4 mm)	(215.4 mm)
11'-1 1/2" to 14'-7"	18"	20"	3"	3 1/2"	19"	21"	3 1/2"	4 1/2"	18'-5" to 24'-4 1/2"	Not Applicable	8 1/2"	8 1/2"	8 1/2"
(338 1 mm) (4445 mm)	(457.2 mm)	(508.0 mm)	(76.2 mm)	(89.3 mm)	(482.6 mm)	(533.4 mm)	(86.4 mm)	(117.5 mm)	(5613 mm) (7439 mm)		(215.4 mm)	(215.4 mm)	(215.4 mm)
14'-7 1/2" to 17'-1"	19"	21"	3 1/2"	4 1/2"	20"	22"	4 1/2"	5 1/2"	over 24'-4 1/2"	Consult Technical Services			
(4448 mm) (5207 mm)	(482.6 mm)	(533.4 mm)	(86.4 mm)	(117.5 mm)	(508.0 mm)	(558.8 mm)	(117.5 mm)	(136.5 mm)	(7439 mm)				
17'-1 1/2" to 20'-1"	20"	22"	3 1/2"	4 1/2"	21"	23"	4 1/2"	5 1/2"					
(5210 mm) (6121 mm)	(508.0 mm)	(558.8 mm)	(86.4 mm)	(117.5 mm)	(533.4 mm)	(584.2 mm)	(117.5 mm)	(136.5 mm)					
over 20'-1"													
(6121 mm)	Consult Technical Services				Consult Technical Services								