


# COILING SERVICE DOOR—MODEL S44\*

08330/ATL  
Buyline 0371

- Motor operator, exterior wall mounted
  - Exterior face mounted
  - Standard, not weatherstripped
- For weatherstripped doors see Model S45.

\*Suffix letters indicate material and/or finish of curtain.  
For alternate material or finish of curtain see Optional Features.


GS	Galvanized without baked-on finish coat
PS	Galvanized with baked-on finish coat
MA	Mill finish aluminum
AA	Clear anodized aluminum
DA	Bronze aluminum
ST	Stainless steel

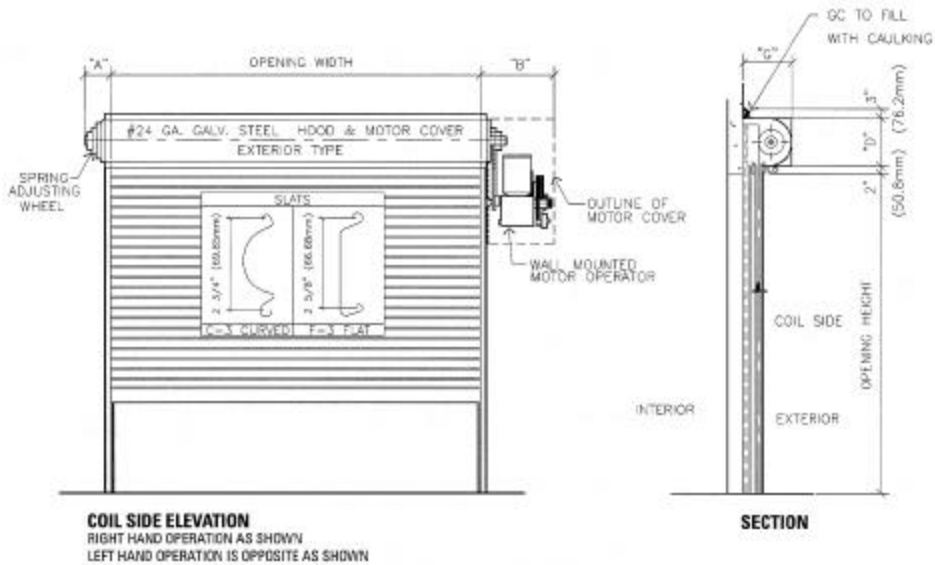

3" (76.2 mm) is dimension of top bead.  
Where headroom is limited, 3" (76.2 mm) requirement can be eliminated by turning bead down.

Windlocks are standard on doors over 18'-4 1/8" (5610 mm) wide and optional for doors under 18'-4 1/8" (5610 mm) wide.

Where clearances are critical, dimensions shown can be reduced. Consult Technical Services.

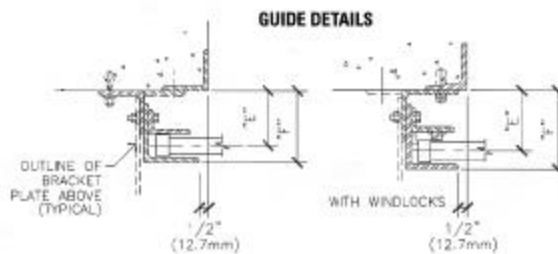

**atlas door™**

# COILING SERVICE DOOR—MODEL S44PS

08330/ATL  
Buyline 0371

## SPECIFICATIONS

### PART 1 GENERAL

#### 1.01 Section Includes

**A. Type:** Coiling Service Doors are to be Atlas Door™ Model S44PS as manufactured by Clopay Building Products Company, Inc.

**B. Operation:** To be motor operated using high starting torque motor, reduction gearing, solenoid brake, limit switches for upper and lower limits of door travel, emergency hand chain with electrical interlock to break motor circuit when hand chain is engaged, magnetic relay contactor, overload protection, pre-wiring to terminal block, and three-button operating station. Motor is to be removable for repair without affecting emergency operation or limit switches. Manufacturer is to furnish wiring diagram.

**NOTE:** For additional motor operator components and controls refer to the motor operators, coiling tab.

**C. Mounting:** To be exterior face mounted on a prepared opening. Motor cover for exterior mounting to be provided.

#### 1.02 Related Work

**A. Opening preparation, miscellaneous or structural steel, access panels, finish or field painting, electrical wires, wiring, disconnect switches, conduit are in the scope of the work of other sections or trades.**

**B. Submit manufacturer's product data and installation instructions for each type of coiling door. Include both published data and any specific data prepared for this project.**

#### 1.03 Single-Source Responsibility

**A. Provide doors, guides, motors, and accessories from one manufacturer for each type of door. Provide secondary components from source acceptable to manufacturer of primary components.**

### PART 2 PRODUCT

#### 2.01 Curtain

**A. Slats:** Cold roll-formed in continuous lengths of galvanized steel interlocked to form curtains.

**B. Endlocks:** Each end of alternate slats to be fitted with endlocks to act as a wearing surface in the guides and to maintain slat alignment.

**C. Windload:** Door construction designed to satisfy windload of 20 PSF (0.96 kPa) or 87 MPH (140 KPH).

**D. Gauge:** Thickness of slat material to be as required by width of opening and windloading conditions.

**E. Galvanizing:** Zinc-coated in accordance with ASTM A653.

**F. Bottom Bar:** Curtain to be reinforced with a bottom bar consisting of two steel angles.

#### 2.02 Spring Counterbalance

**A. Counterbalance:** Housed in a steel pipe of diameter and wall thickness to restrict maximum deflection to .03" per foot (2.5 mm/m) of door width.

**B. Springs:** To be helical torsion type designed to include an overload factor of 25% and for optimum ease of operation. Springs are to be grease packed and are to be mounted on a cold rolled steel inner shaft.

**C. Emergency Hand Chain:** Pull not to exceed 35 lbs. (156 N).

**D. Spring Tension:** Adjustable from outside of end bracket plate.

**E. Ball Bearing:** Sealed, to minimize wear of pipe shaft rotation around inner shaft.

#### 2.03 Bracket Plates

**A. Bracket Plates:** Carrying pipe counterbalancing shaft are to be no less than 1/4" (6.35 mm) thickness and to house ends of door coil. Shape of plate to be square.

**B. Drive End Bracket Plate:** Fitted with a sealed ball bearing.

#### 2.04 Guide and Wall Angle Assembly

**A. Guides/Wall Angles:** Structural steel angles of 3/8" (4.76 mm) minimum thickness.

**B. Depth of Guide:** To provide adequate slat penetration to satisfy specified windloading.

#### 2.05 Hoods

**A. Hoods:** To house coil are to be fabricated of #24 U.S. Gauge galvanized steel.

**B. Reinforcing:** To be laterally reinforced to prevent sag.

**C. Intermediate Hood Supports:** Furnish where door width exceeds 16'-0" (4877 mm).

**D. Top Bead of Hood:** To be suitable for fastening to header and to receive caulking for weather protection.

**E. Motor Cover:** To house wall-mounted motor operator; to be fabricated of #24 U.S. gauge galvanized steel.

#### 2.06 Locking

**A. Integral Gearing:** Of motor operator to provide locking for door.

#### 2.07 Finish

**A. Galvanized Surfaces:** Slats and hood (etc.) galvanized. Baked-on gray or tan coat of epoxy-modified polyester on slats and hood. Shop coat of rust-inhibiting metallic primer on all remaining ungalvanized surfaces, except bearings.

**B. Ungalvanized Surfaces:** Shall consist of a shop coat of rust-inhibiting metallic primer (gray) (brown) on exposed ferrous surfaces, except bearings.

### PART 3 EXECUTION

#### 3.01 Examination

**A. Verify that dimensions are correct and project conditions are suitable for installation. Do not proceed with installation until unsatisfactory conditions have been corrected.**

#### 3.02 Installation

**A. Installation:** To be by authorized Atlas Door representative and in accordance with Atlas' standards and instructions.

**B. Submit manufacturer's product data and installation instructions for each type of coiling door. Include both published data and any specific data prepared for this project.**

**Note to Specifiers...** Please see end of this section for frequently specified Optional Features.

Opening Height	Without Windlocks				With Windlocks				Opening Width	Without Windlocks		With Windlocks	
	"D"	"G"	"E"	"F"	"D"	"G"	"E"	"F"		"A"	"B"	"A"	"B"
to 9'-1" (2769 mm)	16"	16 1/2"	3"	3 3/4"	17"	17 1/2"	3 1/2"	4 1/4"	to 12'-4 1/2" (3781 mm)	6 1/2"	22"	8"	22 1/2"
9'-1 1/2" to 11'-1" (2772 mm) (3376 mm)	17"	17 1/2"	3"	3 3/4"	18"	18 1/2"	3 1/2"	4 1/4"	(215.9 mm) (553.8 mm)	(228.8 mm)	(571.5 mm)	(571.5 mm)	(571.5 mm)
11'-1 1/2" to 14'-7" (3381 mm) (4445 mm)	18"	18 1/2"	3"	3 3/4"	19"	19 1/2"	3 1/2"	4 1/4"	12'-5" to 13'-4 1/2" (3785 mm) (3910 mm)	9"	22 1/2"	8"	22 1/2"
14'-7 1/2" to 17'-1" (4448 mm) (5207 mm)	19"	19 1/2"	3 3/4"	4 1/4"	20"	20 1/2"	4 1/4"	5 1/4"	(220.6mm) (565.2 mm)	(228.8 mm)	(571.5 mm)	(571.5 mm)	(571.5 mm)
17'-1 1/2" to 20'-1" (5210 mm) (6121 mm)	20"	20 1/2"	3 3/4"	4 1/4"	21"	21 1/2"	4 1/4"	5 1/4"	18'-5" to 24'-4 1/2" (5613 mm) (7439 mm)	Not Applicable	9 1/2"	22 1/2"	22 1/2"
over 20'-1" (6121 mm)	Consult Technical Services				Consult Technical Services				over 24'-4 1/2" (7439 mm)	Consult Technical Services			

